

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Roth QuickTemp Heat Distribution Plate



The Norwegian EPD Foundation

Owner of the declaration:

Roth North Europe A/S

Roth QuickTemp Heat Distribution Plate

Declared unit:

1 tonne

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR and NPCR - Part B 010 Part B for Building Boards. Ver. 4.0

NPCR 010:2022 Part B for building boards

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-11349-11293

Registration number:

NEPD-11349-11293

Issue date:

11.06.2025

Valid to:

11.06.2030

EPD software:

LCAno EPD generator ID: 1022032

General information

Product

Roth QuickTemp Heat Distribution Plate

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-11349-11293

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR and
NPCR - Part B 010 Part B for Building Boards. Ver. 4.0
NPCR 010:2022 Part B for building boards

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 tonne Roth QuickTemp Heat Distribution Plate

Declared unit with option:

A1-A3, A4, A5, C1, C2, C3, C4, D

Functional unit:

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Owner of the declaration:

Roth North Europe A/S
Contact person: Stine Bøgh Petersen
Phone: +45 47 33 97 00
e-mail: sustainability@roth-northeurope.com

Manufacturer:

Roth North Europe A/S

Place of production:

Roth North Europe A/S
Centervej 5
3600 Frederikssund, Denmark

Management system:

EN ISO 9001:2015, EN ISO 14001:2015

Organisation no:

34012113

Issue date:

11.06.2025

Valid to:

11.06.2030

Year of study:

2024

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Kim Haugsted Neubert

Reviewer of company-specific input data and EPD: Kim Haugsted Neubert

Approved:



Håkon Hauan, CEO EPD-Norge

Product

Product description:

Roth QuickTemp Heat Distribution Plates are designed for the installation of underfloor heating systems in wooden floor constructions and intermediate floor structures, either with formwork or in grooved chipboard with underlying insulation as well as Roth QuickTemp Universal board EPS 30.

The boards are made of aluminium and are designed to accommodate both 16 mm and 20 mm pipe.

It is available in three different thicknesses. The appropriate thickness is selected based on the required heat output and comfort level.

0.3 mm: Suitable for standard heating requirements.

0.5 mm and 0.7 mm: Recommended for higher heat output and enhanced comfort demands.

Product specification

Materials	Value	Unit
Aluminium	100	%
Packaging, plastic film	0-5	%
Packaging, corrugated board box	0-5	%
Packaging, EURO wooden pallet	0-5	%

Technical data:

For dimension and weight of the different variants see "Additional technical information".

Market:

Denmark, Sweden, Norway, Finland & UK

Reference service life, product

50 years (Haugbølle, K., et.al, 2022)

Reference service life, building

50 years (Haugbølle, K., et.al, 2022)

LCA: Calculation rules

Declared unit:

1 tonne Roth QuickTemp Heat Distribution Plate

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included when specific information are missing. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Metal - Aluminium	ecoinvent 3.9.1	Database	2022
Packaging - Cardboard	ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Packaging - Wood	ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use		De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7		C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND		X	X	X	X	X

System boundary:


Module A1: Packaging has been included by average use of packaging pr. 1 tonnes of product.

Module A4: The transportation distances provided in this EPD are derived from precise data concerning the distances between production facility and various sales departments in different countries. Distribution from each of the sales departments to the end customers a distance of 300 km* is assumed.

*Transportation by truck is assumed on a distribution of 80% EURO 6 and 20% EURO 5, based on data from the company's own logistics provider.

Module A5/C1: Manual installation and demolition has been assumed.

Module C2: The estimated transportation distance to the waste handling facility in this EPD is 100 km, assuming the use of a truck as the transport method.

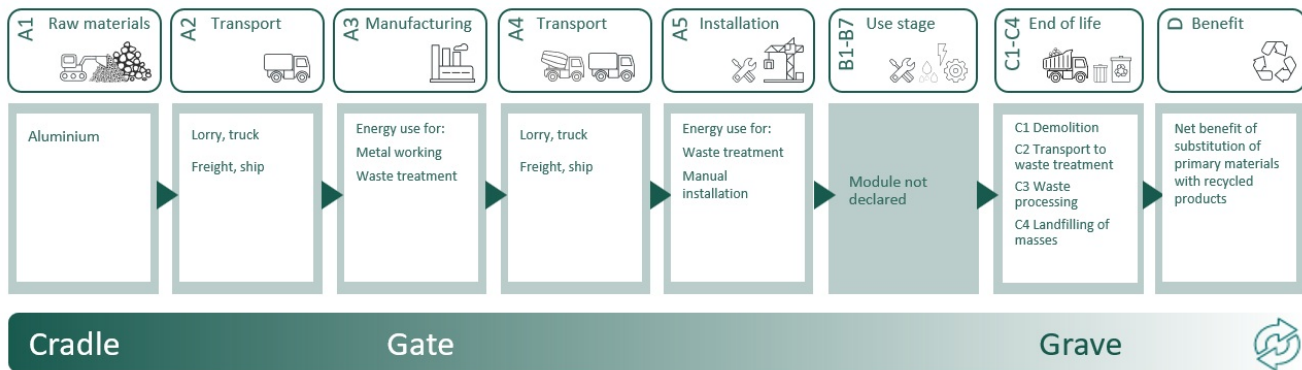

Additional technical information:

This product is available in various variants and options. Below are the article numbers for the Heat Distribution Plates, along with their corresponding dimensions and weight in grams per piece covered.

Article number	Name	Dimensions	g/pcs
17339217.016	Heat Distribution Plate for 16 mm pipe, 40 pcs	0,3x160x1200	183
17339217.116	Heat Distribution Plate for particle- and EPS universal plate	0,5x180x1200	352
17339217.320	Heat Distribution Plate for EPS universal plate for 20 mm pipe	0,5x280x1200	516
17339217.216	Heat Distribution Plate for formwork for 16 mm pipe	0,7x260x1200	676
17339217.020	Heat Distribution Plate for fromwork for 20 mm pipe	0,5x260x1200	483

LCA: Scenarios and additional technical information














The following information describe the scenarios in the different modules of the EPD.

The Roth QuickTemp Heat Distribution Plates can be divided into three pieces in three different sizes. Therefore, it is assumed that there is no waste during installation.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Ship, Coastal Barge (km)	71,0 %	165	0,011	l/tkm	1,82
Ship, Freight, Transoceanic (km)	65,0 %	14394	0,003	l/tkm	43,18
Truck, 16-32 tonnes, EURO 5 (km) - Europe	36,7 %	10	0,044	l/tkm	0,44
Truck, 16-32 tonnes, EURO 5 (km) - Europe	36,7 %	10	0,044	l/tkm	0,43
Truck, 16-32 tonnes, EURO 5 (km) - Europe	36,7 %	88	0,044	l/tkm	3,86
Truck, 16-32 tonnes, EURO 5 (km) - Europe	36,7 %	60	0,044	l/tkm	2,64
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	240	0,043	l/tkm	10,32
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	351	0,043	l/tkm	15,10
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	39	0,043	l/tkm	1,69
Assembly (A5)		Unit	Value		
Waste, packaging, pallet, EUR wooden pallet, single use, average treatment (kg)	kg	0,15			
Waste, packaging, plastic film (LDPE), to average treatment (kg)	kg	0,0023			
Waste of product during installation (Declared unit)	Units	0,00			
Waste, packaging, corrugated board box, to average treatment (kg)	kg	0,024			
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 5 (km) - Europe	36,7 %	100	0,044	l/tkm	4,40
Waste processing (C3)		Unit	Value		
Waste, Materials to recycling (kg)	kg	930,00			
Disposal (C4)		Unit	Value		
Waste, scrap aluminium, to landfill (kg)	kg	70,00			
Benefits and loads beyond the system boundaries (D)		Unit	Value		
Substitution of primary aluminium with net scrap (kg)	kg	930,00			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	GWP-total	kg CO ₂ -eq	2,74E+04	2,74E+02	2,86E-01	0	1,67E+01	0,00E+00	1,01E+00	-8,45E+03
	GWP-fossil	kg CO ₂ -eq	2,75E+04	2,74E+02	4,83E-03	0	1,67E+01	0,00E+00	1,01E+00	-8,26E+03
	GWP-biogenic	kg CO ₂ -eq	-9,57E+01	9,74E-02	2,81E-01	0	6,80E-03	0,00E+00	3,21E-03	-3,80E+01
	GWP-luluc	kg CO ₂ -eq	5,42E+00	1,54E-01	1,24E-06	0	5,83E-03	0,00E+00	3,91E-04	-1,57E+02
	ODP	kg CFC11 -eq	6,21E-04	5,98E-05	7,73E-10	0	3,80E-06	0,00E+00	2,81E-07	-6,97E-04
	AP	mol H+ -eq	1,70E+02	4,89E+00	3,63E-05	0	6,82E-02	0,00E+00	7,80E-03	-5,59E+01
	EP-FreshWater	kg P -eq	5,41E+00	1,70E-03	5,46E-08	0	1,31E-04	0,00E+00	1,82E-05	-3,19E-01
	EP-Marine	kg N -eq	3,01E+01	1,21E+00	1,55E-05	0	2,02E-02	0,00E+00	2,80E-03	-7,06E+00
	EP-Terrestrial	mol N -eq	3,19E+02	1,34E+01	1,65E-04	0	2,24E-01	0,00E+00	3,15E-02	-7,76E+01
	POCP	kg NMVOC -eq	9,51E+01	3,58E+00	4,26E-05	0	6,84E-02	0,00E+00	8,91E-03	-2,62E+01
	ADP-minerals&metals ¹	kg Sb-eq	4,10E-02	4,67E-03	7,95E-08	0	4,52E-04	0,00E+00	7,65E-06	1,27E-02
	ADP-fossil ¹	MJ	2,53E+05	3,81E+03	5,62E-02	0	2,51E+02	0,00E+00	2,32E+01	-1,05E+05
	WDP ¹	m ³	1,90E+05	2,42E+03	8,66E-02	0	2,40E+02	0,00E+00	6,01E+02	-4,73E+06

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption







"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Additional environmental impact indicators




Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
 PM	Disease incidence	2,39E-03	8,48E-06	4,50E-10	0	1,20E-06	0,00E+00	1,35E-07	-5,77E-04
 IRP ²	kgBq U235 -eq	3,47E+02	1,65E+01	2,08E-04	0	1,10E+00	0,00E+00	1,55E-01	-4,57E+02
 ETP-fw ¹	CTUe	1,13E+05	2,55E+03	6,50E-02	0	1,85E+02	0,00E+00	4,33E+04	-1,25E+05
 HTP-c ¹	CTUh	2,64E-05	0,00E+00	6,00E-12	0	0,00E+00	0,00E+00	1,96E-09	-2,09E-05
 HTP-nc ¹	CTUh	4,75E-04	1,60E-06	3,14E-10	0	2,00E-07	0,00E+00	3,49E-08	-2,44E-04
 SQP ¹	dimensionless	5,59E+04	1,69E+03	3,30E-02	0	1,73E+02	0,00E+00	6,52E+01	-8,97E+02

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed




1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	PERE	MJ	1,26E+04	4,25E+01	1,14E-03	0	3,55E+00	0,00E+00	3,24E+00	-3,80E+04
	PERM	MJ	2,39E+00	0,00E+00	-2,39E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PERT	MJ	1,26E+04	4,25E+01	-2,39E+00	0	3,55E+00	0,00E+00	3,24E+00	-3,80E+04
	PENRE	MJ	2,53E+05	3,81E+03	5,63E-02	0	2,51E+02	0,00E+00	2,32E+01	-1,05E+05
	PENRM	MJ	9,84E-02	0,00E+00	-9,84E-02	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PENRT	MJ	2,53E+05	3,81E+03	-4,21E-02	0	2,51E+02	0,00E+00	2,32E+01	-1,05E+05
	SM	kg	2,84E+01	0,00E+00	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	1,17E+02	1,46E+00	3,35E-05	0	1,27E-01	0,00E+00	6,72E-02	-1,55E+01
	NRSF	MJ	1,63E+02	7,94E+00	3,55E-04	0	4,53E-01	0,00E+00	3,14E-02	5,59E+01
	FW	m³	1,77E+03	3,19E-01	3,94E-05	0	2,65E-02	0,00E+00	3,04E-02	-2,08E+02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"






*INA Indicator Not Assessed

End of life - Waste										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 HWD	kg	2,09E+03	1,82E-01	0,00E+00	0	1,28E-02	0,00E+00	0,00E+00	3,48E+01	
 NHWD	kg	2,09E+04	1,00E+02	1,85E-01	0	1,20E+01	0,00E+00	7,00E+01	-2,40E+03	
 RWD	kg	2,73E-01	2,62E-02	0,00E+00	0	1,71E-03	0,00E+00	0,00E+00	-4,29E-01	

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 CRU	kg	0,00E+00	0,00E+00	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 MFR	kg	2,55E+01	0,00E+00	2,36E-02	0	0,00E+00	9,30E+02	0,00E+00	0,00E+00	
 MER	kg	1,22E+00	0,00E+00	1,59E-01	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 EEE	MJ	1,41E+01	0,00E+00	1,11E-01	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 EET	MJ	2,58E+01	0,00E+00	1,67E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content		
Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in accompanying packaging	kg C	7,66E-02

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, China (kWh)	ecoinvent 3.6	1102,91	g CO ₂ -eq/kWh
Electricity, Denmark (kWh)	ecoinvent 3.6	338,20	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

No tests have been carried out on the product concerning indoor environment.






Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	2,74E+04	2,74E+02	4,83E-03	0	1,67E+01	0,00E+00	1,01E+00	-8,07E+03

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2021) EPD generator v2021.09 - Background information for EPD generator tool system verification, LCA.no AS, report number: 07.21
 Vold, M. et al. (2022) EPD generator for Building boards
 Background information for EPD generator application and LCA data, LCA.no report number 05.22
 NPCR Part A: Construction products and services. Ver. 2.0. March 2021, EPD-Norge.
 NPCR 010 Part B for Building Boards. Ver. 4.0, March 2022, EPD-Norge.
 Haugbølle, K., Mahdi, V., Morelli, M., & Wahedi, H. (2022). BUILD Levetidstabel. BUILD - Institut for Byggeri, by Og Miljø, 2, 978-87-563-2072-6.
<https://build.dk/Pages/BUILD-levetidstabel.aspx>

 epd-norge <small>Global program operator</small>	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Roth North Europe A/S Centervej 5, 3600 Frederikssund, Denmark	Phone: +45 47 33 97 00 e-mail: sustainability@roth-northeurope.com web: roth-northeurope.com
	Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal