


article#	6400100
article description	Ladestation EV11.TWIN 2x11kW Typ2 Dose
description long	Ladestation EV11.TWIN -2x 11kW Ladeleistung -2x Ladesteckdose Typ2 inkl. Verriegelung -integrierter DC-Fehlerstromsensor -LED Statusanzeigen -Absicherung: 2x FI 40A/4/0,03A (TYP A25AT), 2x LS 16A 3p C, Voricherung Zuleitung max. 32A -Fixanschluss auf Hauptklemmen 5x10qmm (OVE EN IEC 61851 / Ladebetriebsart 3) -robustes Metallgehäuse, absperierbar -wetterfest IP44 (im geschlossenen Zustand) -Abmessungen inkl. optionalen Untergestell: 380x1110x300mm (BxHxT) (Untergestell 7570010185 muss seperat bestellt werden)
GTIN (EAN)	9003399667381
country of origin	PL
customs number	85371098
net weight	24.000 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC002883
Installation side connection model	3-phase
Input voltage	230 – 400 V
Frequency	50 Hz
Nominal connection power	22 kW
Number of charging units	2
Max. power per charging point	11 kW
Width	380 mm
Height	1100 mm
Depth	300 mm
Mounting method	Portable
Number of socket outlets Type 2	2
Number of earth leakage circuit breakers type A	2
Charging cable permanently lockable at charging device	True
DC residual current detection	True
With circuit breaker	True
With energy meter	False
Material housing	Steel
Degree of protection (IP rating)	IP44
Connectable conductor cross section	2.5 – 10
With MID compliant energy meter	False
Calibration law compliant	False



<https://www.pcelectric.at/shop/en/?func=detail&artnr=6400100>

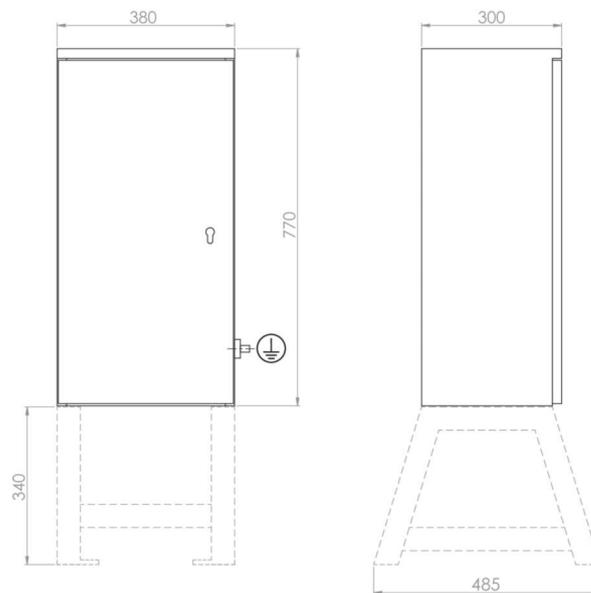